




Dexter Spring Axle Overhang 1,000lbs - 8,000lbs

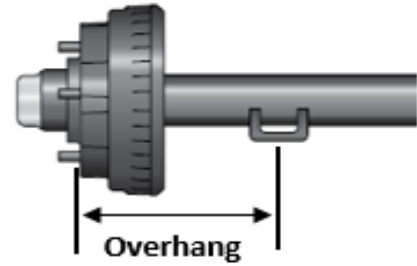

Measure from Spring Center to Hub Face
Min/Max is per side
For Idler models, use Drum measurement

Capacity	Model	Type	Min Drum	Min Disc	Max
1k-2.2k	D20	Straight	5.75"	N/A	7.62"
		Drop 4"	7.62"	N/A	9"
2.3k-4k	D30 / D35	Straight	5.62"	7.50"	9"
		Drop 4"	7"	7.50"	9"
		Drop 6"	7.87"	7.87"	9"
		3in Tube Straight	5.62"	7.50"	11.50"
		3in Tube Drop 4"	7"	7.50"	11.50"
4.1k-4.4k	D44	Straight	6"	N/A	9.50"
5.2k	D52	Straight	6.63"	9"	9.50"
		Drop 4"	7.87"	9"	9.50"
		Nev-R-Lube (straight axle only)	6.19"	9"	9.50"
6k	D60	Straight	6.63"	9"	10"
		Drop 4"	7.87"	9"	10"
		Nev-R-Lube (straight axle only)	6.19"	9"	10"
7k	D70	Straight	6.63"	8"	9"
		Drop 4"	7.87"	8"	9"
		Nev-R-Lube (straight axle only)	6.37"	8"	9"
7.2k	D72	Straight	7"	N/A	9"
		Drop 4"	7.87"	N/A	9"
		Nev-R-Lube (straight axle only)	7"	N/A	9"
8k	D80	Straight (3-3/8" Brakes)	8"	Call	9.50"
		Drop 4"	9"	Call	9.50"
		Nev-R-Lube (straight axle only)	8"	Call	9.50"
8k	D80N	Straight (2-1/2" Brakes)	7"	Call	8"

Note:
Minimums are based on manufacturing tolerances only.
Some tire wheel combinations may create interference.

Refer to Dexter for additional specifications