



**Wholesale Trailer Supply**

Phone (800) 400-5275  
 Fax (866) 400-5275  
 wholesaletrailer.com

**Special Order Axle**



**Light Duty**  
**600 - 8,000 lbs. Capacity**

Date: \_\_\_\_\_  
 Customer: \_\_\_\_\_

Location:		
Contact:	WTS	
Phone:	QTE#:	
Fax:	ORD#:	

Capacity: \_\_\_\_\_ Quantity: \_\_\_\_\_  
 Model: \_\_\_\_\_  
 Hub Face: \_\_\_\_\_ Bracket O/S: \_\_\_\_\_

**Axle Type:**  Beam Only  Idler  Brake  Brk Flange

**Lube:**  Grease  Oil  EZ Lube

**Valcrum Dust Cap:**  Yes (5.2k-8k 865, Threaded Cap)

**Camber:**  Yes  No  Center V-Bend (1k-7k)

**Start Angle:**  -22.5° Up  +10° Down  
 -10° Up  +22.5° Down  
 0° Flat  +32° Down  
 +45° Down

**Spindle:**  Standard  Short  Removable Yes (1k-7k, EZ Lube)

**Brake Type:**  Electric  Hydraulic Disc  
 Electric Nev-R-Adjust  Hydraulic Free Backing  
 Hydraulic Uni-Servo  Hydraulic Self Adjust  
 Hydraulic Duo Servo  Parking Brake


**Idler:** (2k 545)  5-1/2in Diameter Hub  6-1/2in Diameter Hub

**Bolt Pattern:**  440  545  5475  550  555  655  865


**Stud Size:**  1/2-20 (Common)  9/16-18  5/8-18 (8k)

**Wheel Nuts:** 1/2" & 9/16" 5/8"  5/8-18 Flange Nut (Swivel)  
 Come with 60° Cone Nuts Choose Nut Style  5/8-18 Flange Nut (Non-Swivel)  
 5/8-18 90° Cone Nut w/Clamp Ring


**All special order axles require an authorized signature and are Non-Returnable**

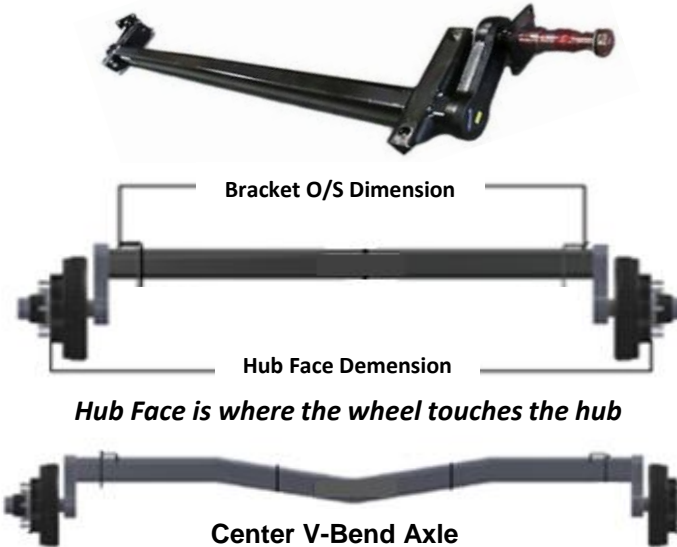

**Top Mount Brackets: (Standard)**

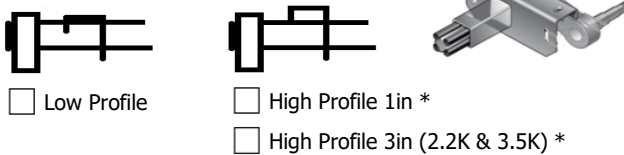


**Bracket Orientation:**  
 Standard Inboard  Reverse Outboard

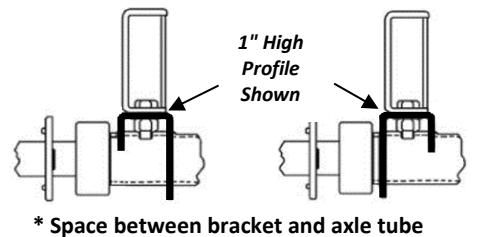

**Side Mount Brackets: (Optional)**

Yes  
 Steel  
 Aluminum

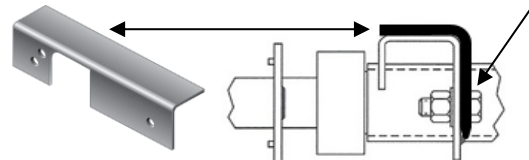

**Pre-Wired:**  Yes  No

<b>Notes:</b>	
	<i>Refer to manufacturer for additional specifications</i>

**Signature:** \_\_\_\_\_

**Date:** \_\_\_\_\_

**Print Name:** \_\_\_\_\_

**PO#:** \_\_\_\_\_