



Wholesale Trailer Supply

Phone (800) 400-5275

Fax (866) 400-5275

wholesaletrailer.com

Special Order Axle

Date: _____

Customer: _____

Location: _____

Contact: _____ **WTS**

Phone: _____ **QTE#:** _____

Fax: _____ **ORD#:** _____

Capacity: _____

Quantity: _____

Model: _____

Hub Face: _____

Bracket O/S: _____

Axle Type: ☐ Beam Only ☐ Idler ☐ Brake ☐ Brk Flange

Lube: ☐ Grease ☐ Oil ☐ EZ Lube

Valcum Dust Cap: ☐ Yes (5.2k-8k 865, Threaded Cap)

Camber: ☐ Yes ☐ No ☐ Center V-Bend (1k-7k)

Start Angle: ☐ -22.5° Up ☐ +10° Down
☐ -10° Up ☐ +22.5° Down
☐ 0° Flat ☐ +32° Down
☐ +45° Down

Spindle: ☐ Standard ☐ Short ☐ Removable Yes (1k-7k, EZ Lube)

Brake Type: ☐ Electric ☐ Hydraulic Disc
☐ Electric Nev-R-Adjust ☐ Hydraulic Free Backing
☐ Hydraulic Uni-Servo ☐ Hydraulic Self Adjust
☐ Hydraulic Duo Servo ☐ Parking Brake

Idler: (2k 545) ☐ 5-1/2in Diameter Hub ☐ 6-1/2in Diameter Hub

Bolt Pattern: ☐ 440 ☐ 545 ☐ 5475 ☐ 550 ☐ 555 ☐ 655 ☐ 865

Stud Size: ☐ 1/2-20 (Common) ☐ 9/16-18 ☐ 5/8-18 (8k)

Wheel Nuts: ☐ 1/2" & 9/16" ☐ 5/8" ☐ 5/8-18 Flange Nut (Swivel)
Come with 60° Cone Nuts Choose Nut Style ☐ 5/8-18 Flange Nut (Non-Swivel)
☐ 5/8-18 90° Cone Nut w/Clamp Ring

All special order axles require
an authorized signature and are Non-Returnable



Light Duty

600 - 8,000 lbs. Capacity



Start Angle



Measure when unloaded

Overhang is measured
from outside of bracket to
hub face

See overhang chart
for specifications

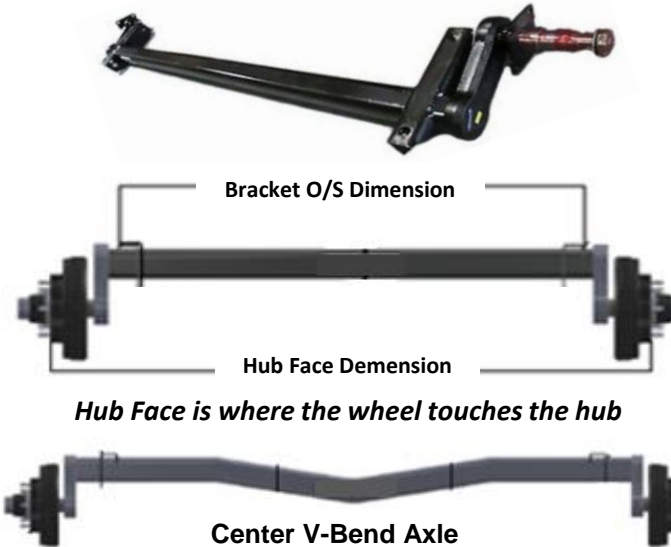


Center V-Bend Axle

Top Mount Brackets: (Standard)



☐ Low Profile




☐ High Profile 1in *



☐ High Profile 3in *


Bracket Orientation:
☐ Standard Inboard ☐ Reverse Outboard

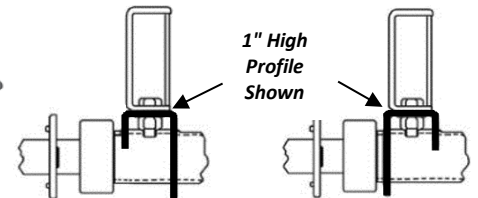

* Space between bracket and axle tube

Side Mount Brackets: (Optional)

☐ Yes
☐ Steel
☐ Aluminum

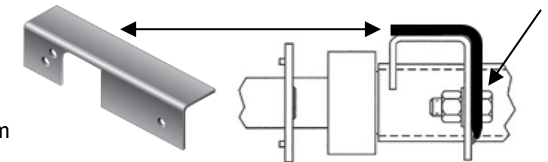

Pre-Wired: ☐ Yes ☐ No

Notes:

Refer to manufacturer for additional specifications

Signature: _____

Date: _____

Print Name: _____

PO#: _____