



Wholesale Trailer Supply

Phone (800) 400-5275
 Fax (866) 400-5275
 wholesaletrailer.com

Special Order Axle



MEDIUM DUTY

9,000lbs - 12,000 lbs. Capacity

Date: _____
 Customer: _____
 Location: _____
 Contact: _____ **WTS**
 Phone: _____ **QTE#:** _____
 Fax: _____ **ORD#:** _____
 Capacity: _____ Quantity: _____
 Model: _____
 Hub Face: _____ Bracket O/S: _____

Axle Type: Beam Only Idler Brake

Lube: Grease Oil (Standard)

Valcrum Dust Cap: Yes


Start Angle: -22.5° Up +10° Down
 -10° Up +22.5° Down
 0° Flat +32° Down
 +45° Down

Brake Type: Electric Hydraulic Disc
 Hydraulic Single Servo Hydraulic Free Backing
 Hydraulic Duo Servo Self Adjusting
 Parking Brake

Bolt Pattern 865, 5/8-18 Studs, 4.75" Pilot Hole


Wheel Nuts: 5/8-18 Flange Nut (Swivel)
 5/8-18 Flange Nut (Non-Swivel)
 5/8-18 90° Cone Nut W/Clamp Ring

All special order axles require an authorized signature and are Non-Returnable

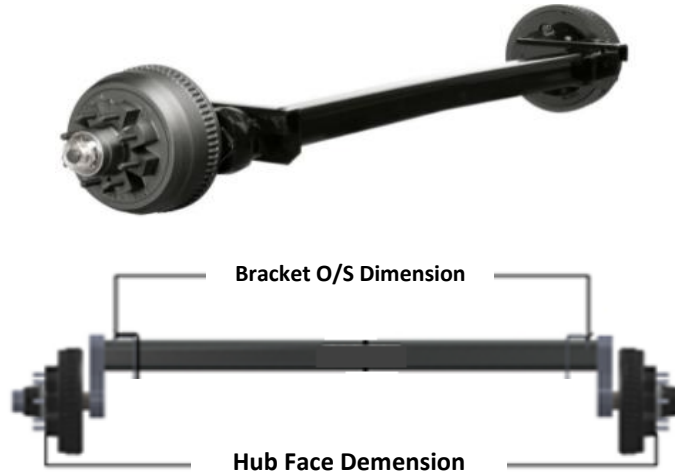


Hub Face is where the wheel touches the hub

Top Mount Brackets: (Standard)

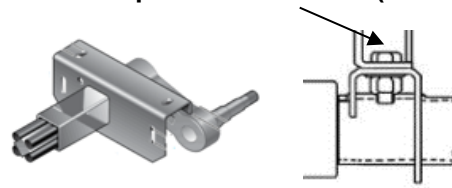


9k - 12k
 1" High Profile
 Only

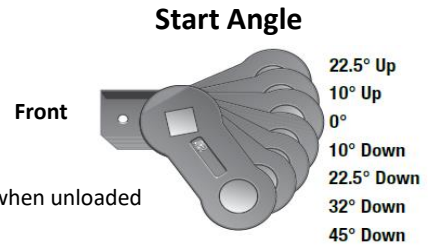


Overhang is measured from outside of bracket to hub face

See overhang chart for specifications




Bracket Orientation:

Standard Inboard Reverse Outboard

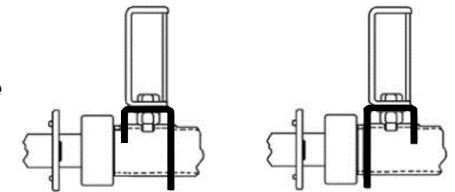

Side Mount Brackets: (Optional) Yes

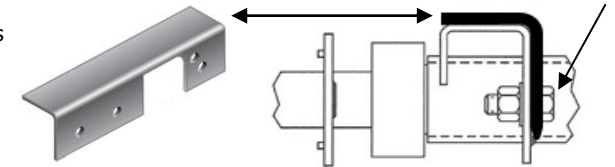

Pre-Wired: Yes No

Notes:	
	<i>Refer to manufacturer for additional specifications</i>

Signature: _____

Date: _____

Print Name: _____

PO#: _____